



# ECLIPSE STRUCTURAL SOIL

## TYPICAL TREE PLANTING ARRANGEMENT

- ← A continuous- structural soil base under the entire sidewalk greatly increases the volume of deep soil zone available to trees

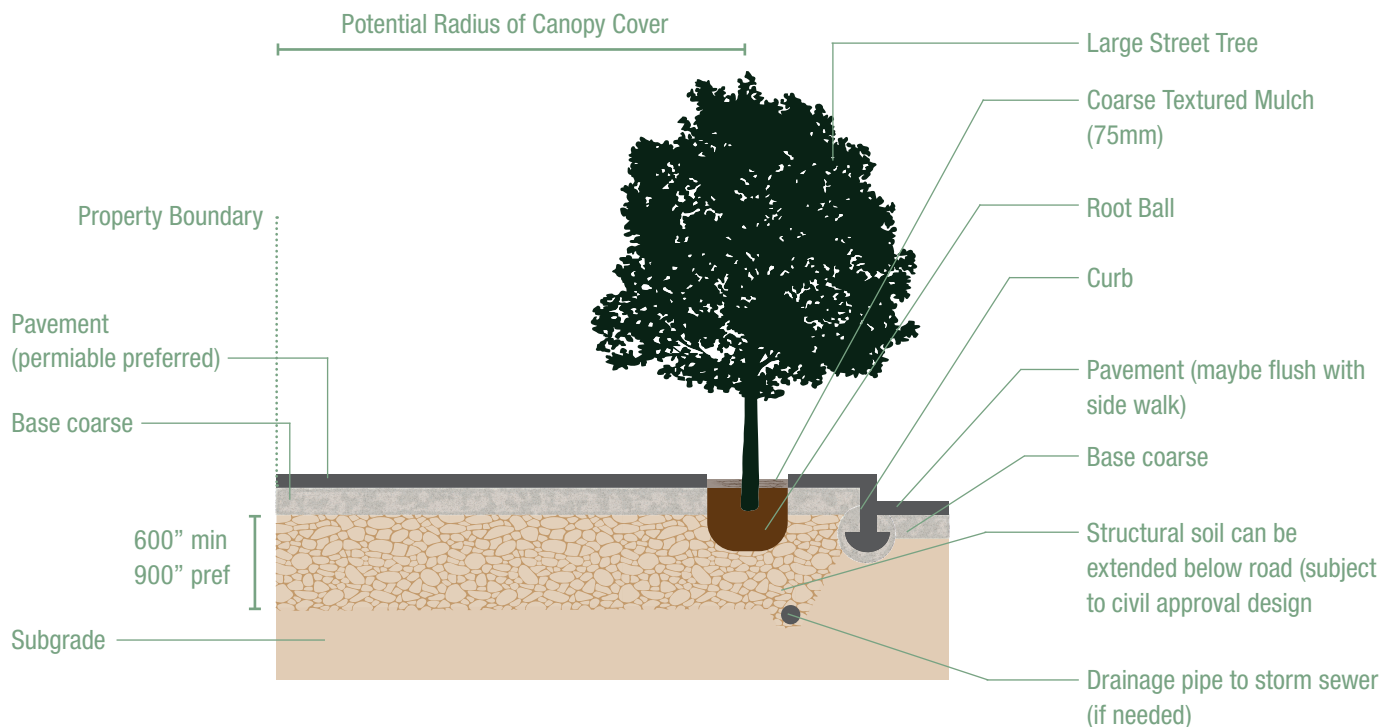


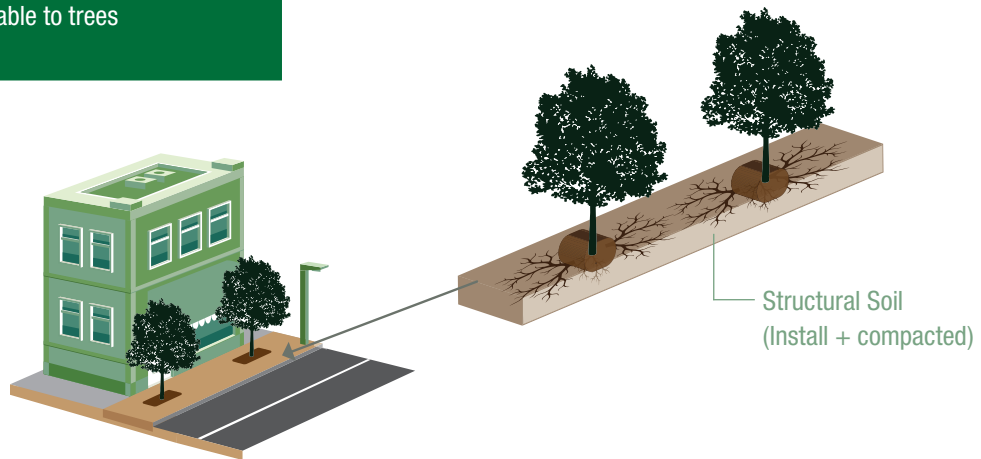

## Standard Maximum Dry Density/Optimum Moisture Content (AS1289.5.1.1) & Moisture Content (AS1289.2.1.1) Test Report

Client:	Eclipse Soils	Sample Details:	Site 1
Project:	Abercrombie	Depth of Sample:	-
Location:	-	Sample Description:	0

Job No:	60066	SVLTRF:	9393	Sample No:	P19/4797
Report No:	60066-P19/4797MDD	Issued Date:	05-Aug-19	Revision No:	0

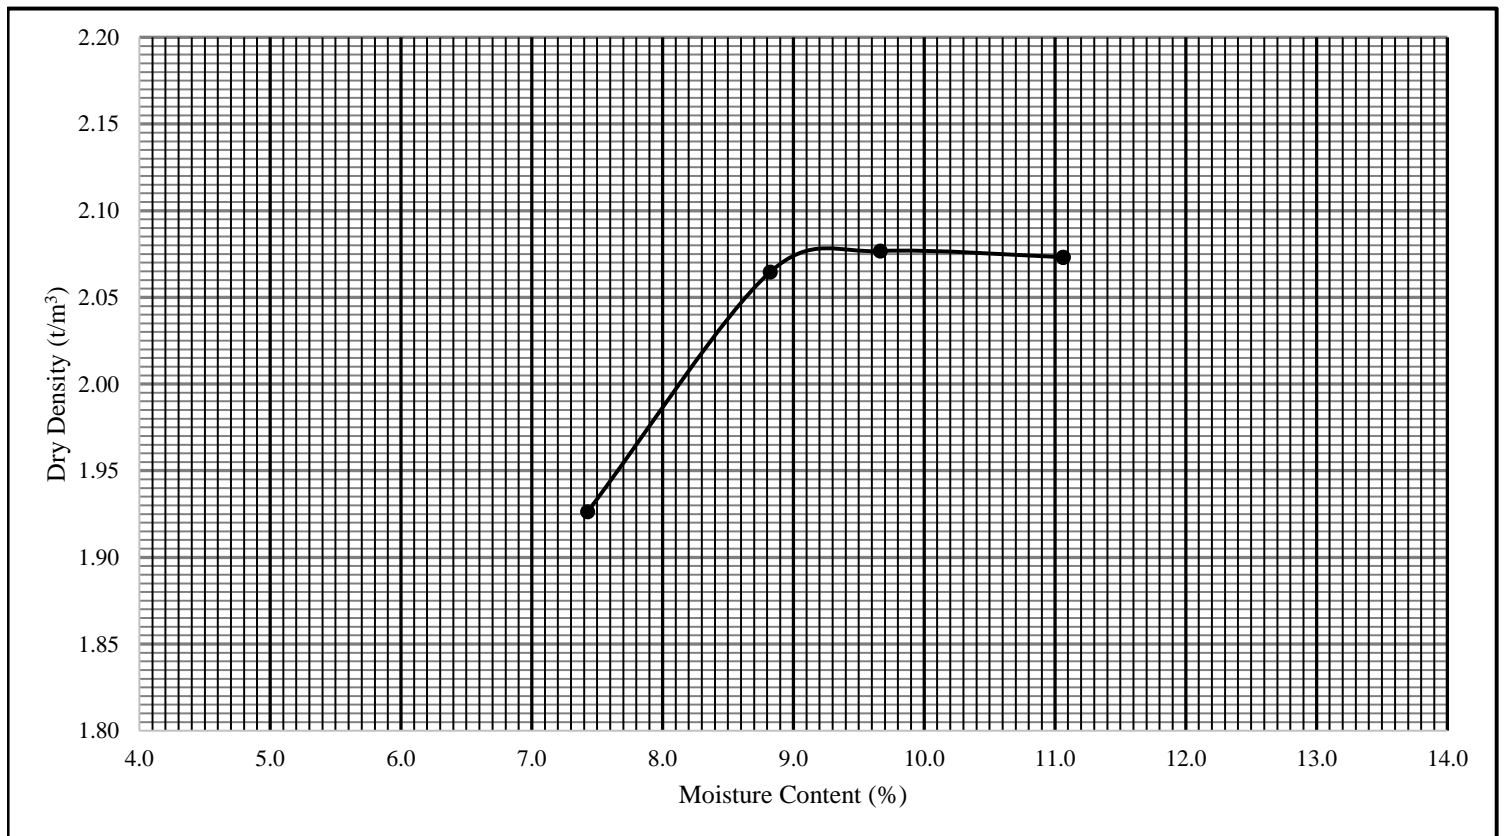

Date of test:	2/08/19
Maximum Dry Density (t/m³) :	2.08
Optimum Moisture Content (%) :	10.0
Curing Period (hrs):	2
Method Used To Determine Liquid Limit:	Visual
Retained on 19.0mm (%):	65

Client Address: Level 2 40 Subiaco Road Subiaco WA 6008

Sampling Procedure: Tested as received

Notes:

Approved signature: John Tenbokkel



Accreditation for compliance with ISO/IEC 17025-Testing.  
This document may not be reproduced except in full.